



**Product  
overview**

A side-step from the traditional acoustic ceiling tile, 3D Ceiling Tiles are made from 100% polyester fibre and moulded to form abstract, three-dimensional shapes.

The 3D Ceiling Tile is designed to be direct fixed or fit within a standard ceiling grid; lightweight and semi-rigid for easy installation.

**Specification**

(Ceiling) treatment shall be 3D Ceiling Tiles from thermally moulded, felted polyester material containing not less than 55% recycled material as manufactured by Autex. [www.autexglobal.com](http://www.autexglobal.com)

Tile (S-5.\_), colour (.\_), sound absorption: Class C, NRC 0.75. Fire rating ISO 9705:

Classification: Group 1-S, EN13501-1:2007+A1:2009: B - s1, d2, ASTM E-84-14 Class A, FS:0 - SD:10

Install as per Autex Acoustics recommendations.

**Colour  
options**



Porcelain



Stonewash



Blush



Stately



Charcoal



Noir



Silver



Civic



Bark



Fawn



Avocado



Granny Smith



Brilliant Orange



Blazing Red



Electric Blue



## Product specifications

**Product name** 3D Ceiling Tiles S-5.26, S-5.28, S-5.34, S-5.53  
**Composition** 100% polyester fibre (PET)  
**Required grid size** 600 mm x 600 mm with 24 mm tee

### Installation

Designed to fit a 600 mm x 600 mm grid with a 24 mm tee. Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.


Product name	S-5.26	S-5.28	S-5.34	S-5.53
Tile dimensions	595 mm x 595 mm	595 mm x 595 mm	595 mm x 595 mm	595 mm x 595 mm
Tile tolerance	(+0.5 mm) (+0.5 mm)	(+0.5 mm) (+0.5 mm)	(+0.5 mm) (+0.5 mm)	(+0.5 mm) (+0.5 mm)
Depth	83 mm	62 mm	64 mm	63 mm
Depth tolerance	(+0.5 mm)	(+0.5 mm)	(+0.5 mm)	(+0.5 mm)
Weight	1680 gsm	1680 gsm	1680 gsm	1680 gsm

## Acoustic performance

3D Ceiling Tiles are specifically designed to reduce and control reverberated noise and echo in building interiors. To increase acoustic performance, use Autex AAB 35-25 polyester acoustic insulation as an infill. Refer to [www.autexglobal.com](http://www.autexglobal.com).

Sound Absorption Coefficients according to ISO 354.  
 University of Auckland Testing Service  
 3D Ceiling Tiles without AAB 35-25 - Test No: T1012-3  
 3D Ceiling Tiles with AAB 35-25 - Test No: T1012-5

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
● 3D Ceiling Tiles without AAB 35-25	0.15	0.45	0.65	0.90	0.90	0.80	0.75
● 3D Ceiling Tiles with AAB 35-25	0.25	0.60	0.95	1.05	1.00	0.90	0.90

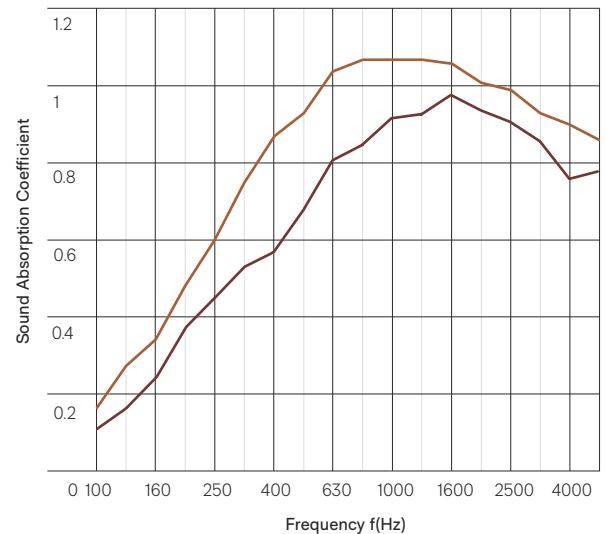

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

## Product specifications

**Product name** 3D Ceiling Tiles S-5.37  
**Composition** 100% polyester fibre (PET)  
**Required grid size** 600 mm x 600 mm with 24 mm tee

### Installation

Designed to fit a 600 mm x 600 mm grid with a 24 mm tee. Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.

Product name	S-5.37
Tile dimensions	595 mm x 595 mm
Tile tolerance	(+0.5 mm) (+0.5 mm)
Depth	142 mm
Depth tolerance	(+0.5 mm)
Weight	1680 gsm



## Acoustic performance


3D Ceiling Tiles are specifically designed to reduce and control reverberated noise and echo in building interiors. To increase acoustic performance, use Autex AAB 35-25 polyester acoustic insulation as an infill. Refer to [www.autexglobal.com](http://www.autexglobal.com).

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
● 3D Ceiling Tiles S-5.37 142 mm	0.15	0.65	0.60	0.70	0.75	0.70	0.65

\*These designs don't typically support the AAB application.

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354.  
University of Auckland Testing Service  
3D Ceiling Tiles S-5.37 142 mm - Test No: T1316-4

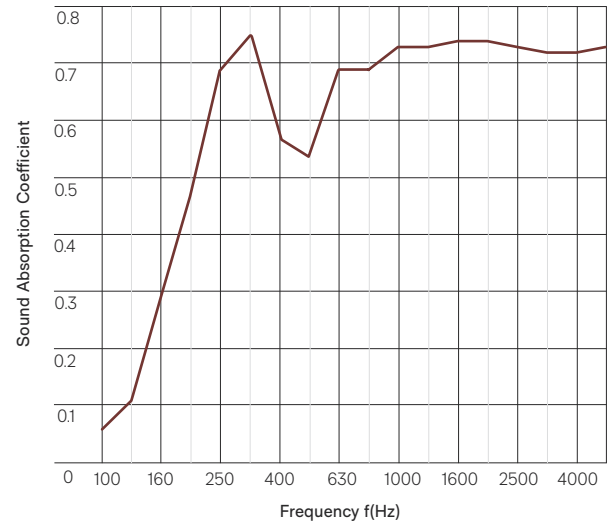

## Product specifications

### Fire ratings

3D Ceiling Tiles is a product made from Workstation as the base material. Workstation has been evaluated using the following test methods:

#### ISO 9705: 1993

Classification: Group 1-S

Smoke production rate:

<5.0m<sup>2</sup>/s

As required by NZBC C/VM2

#### AS ISO 9705 - 2003

Classification: Group 1

(SMOGR<sub>arc</sub>): <100m<sup>2</sup>/s<sup>2</sup>

Assessed using methodology

AS ISO 9705:2003

in accordance with AS 5637:2015,

as required by BCA Specification C1:10-4

FAR 4055

#### EN13501-1:2007

(6mm Workstation)

B - s1, d2

Report WF 336913

#### ASTM E-84-14

Class A, FS:0 - SD:10

Report RJ3297

### VOC emissions

Autex polyester has been tested for chemical emissions in accordance with ASTM D5116 and is considered a low VOC product.

VOC concentration:

0.009 mg/m<sup>3</sup> (7 days).

### Water vapour sorption

ASTM C1104 / C1104M-13a

Test conditions: 49°C, 95%RH

Water vapour absorbed and adsorped after 4 days:

0.4% by weight.

### Microbial resistance

ASTM G21-15

Growth rating: 0 (No growth)

3D Ceiling Tiles do not promote the growth of moulds and mildew.

### Colour fastness to light

3D Ceiling Tiles are suitable for indoor use only. Lightfastness

is dependent on use and

exposure. 3D Ceiling Tiles

have been evaluated to the

following standard:

ISO 105-B02:2014

Rating: 6 (Highest = 7)

### Colour fastness to rubbing

ISO 105-X12:2016

Dry rating: 4-5 (Highest = 5)

Wet rating: 4-5 (Highest = 5)

### Pattern repeat

Non-woven. No pattern

repeat, but the product has a

directional grain. Product may

vary from samples and batch

to batch due to fibre blending

and lay-up, which is an inherent

feature of this product.

### Fabric care

Blot spills from fabric quickly.

Wipe with a damp cloth. Avoid

rubbing and using excessive

amounts of water as this will

affect the finish. Use carpet

or upholstery shampoo as

directed. Blot with a clean, dry

cloth after each application of

the solution.

Custom printed 3D Ceiling

Tiles require the services of a

specialist cleaning company.

Refer to the 3D Ceiling Tiles

Care and Maintenance Guide

for more information.

### Environmental

Autex Acoustics is committed to

best practice through our ISO

14001 certified Environmental

Management Systems.

3D Ceiling Tiles contain a

minimum of 55% previously

recycled polyester fibre

(from PET bottle-flake).

Off-cuts and manufacturing

waste are re-used or recycled

wherever possible.

### 3D Ceiling Tiles are

manufactured from 100%

polyester fibre and do not

contain formaldehyde binders.

Autex Acoustics polyester fibre

supports safer indoor air quality

and will not become a potential

airborne pollutant.

### Service

For further information about

3D Ceiling Tiles or any other

Autex Acoustics product, please

contact your account manager

or visit our website.



## Light reflectance values by colour

3D Ceiling Tiles are suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

Civic	57	Avocado	11
Silver	23	Blush	10
Porcelain	22	Blazing Red	8
Fawn	20	Bark	5
Granny Smith	20	Stately	3
Stonewash	19	Charcoal	3
Brilliant Orange	15	Bark	1
Electric Blue	12		

## Caring for the environment

3D Ceiling Tiles are manufactured using 100% polyester fibre and contain a minimum of 55% recycled fibre (from PET plastics). Our products are designed to be recycled at the end of their life too.

We have continual improvement programmes in which we implement a range of initiatives to mitigate the environmental 'hotspots' that we have identified. Our products are GreenRate Level A, Health Product Declaration (HPD), and CDHP Standard certified.

3D Ceiling Tiles are DeclareSM certified to be Red List free and can be used in Living Building Challenge projects. Autex has a high functioning Environmental Management System (ISO 14001) to enhance our environmental performance and contribute to sustainable development.



- **Autex Industries Ltd**  
702-718 Rosebank Rd  
Private Bag 19988  
Avondale 1746, Auckland  
New Zealand  
Freephone 0800 428 839  
Phone +64 9 828 9179  
Fax +64 9 828 5810

- **Autex Australia Pty Ltd**  
166 Bamfield Road  
PO Box 5099  
West Heidelberg, Melbourne  
VIC 3081, Australia  
Freephone 1800 678 160  
Phone +61 3 9457 6700  
Fax +61 3 9457 1020

- **Autex Acoustics Ltd**  
Unit J4, Lowfields Way,  
Lowfields Business Park,  
Elland, West Yorkshire  
Hx5 9Da  
United Kingdom  
Phone +44 0 1422418899

- **Autex Acoustics LLC**  
19350 Van Ness Avenue  
Torrance, CA 90501  
United States of America  
Phone +1 424 203 1813

An ISO 9001, ISO 14001 and ISO 45001 certified company. The brand names and logos mentioned herein are registered or unregistered trademarks either owned or used under license by Autex Industries Limited or other members of the Autex Group. The contents of this document are protected by Copyright 2021 Autex Industries Ltd. All Rights Reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.